




ACOUSTIC & ELECTRICAL SPECS:

**Use of digital crossover highly recommended. Time alignment of components via delay is necessary for proper performance. Check www.iblpro.com/ae for the most recent crossover recommendations.*

250 W

Refer to the product specification sheet for specification test and measurement conditions.

CHANGING CROSSOVER MODE (From Passive to Bi-Amp)

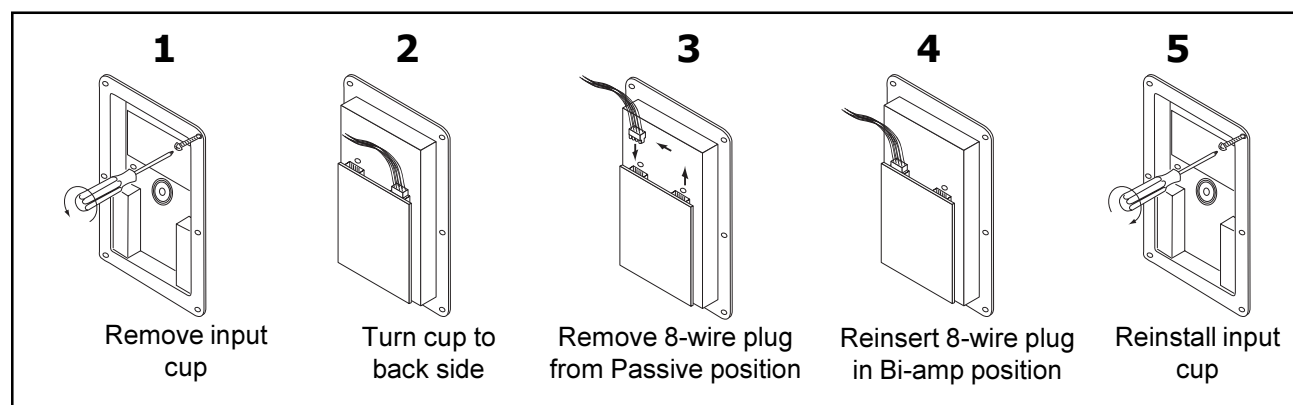


Do **NOT** use the stock 10 mm flathead screws that come with the cabinet for attaching brackets or rigging. Use only load-rated bolts, which may come with the bracket or rigging system.

SUSPENSION WARNING

Suspending Cabinet To Be Done Only by
Qualified Personnel Using Safe Rigging Practices.

DETAILED DIMENSIONAL DIAGRAM

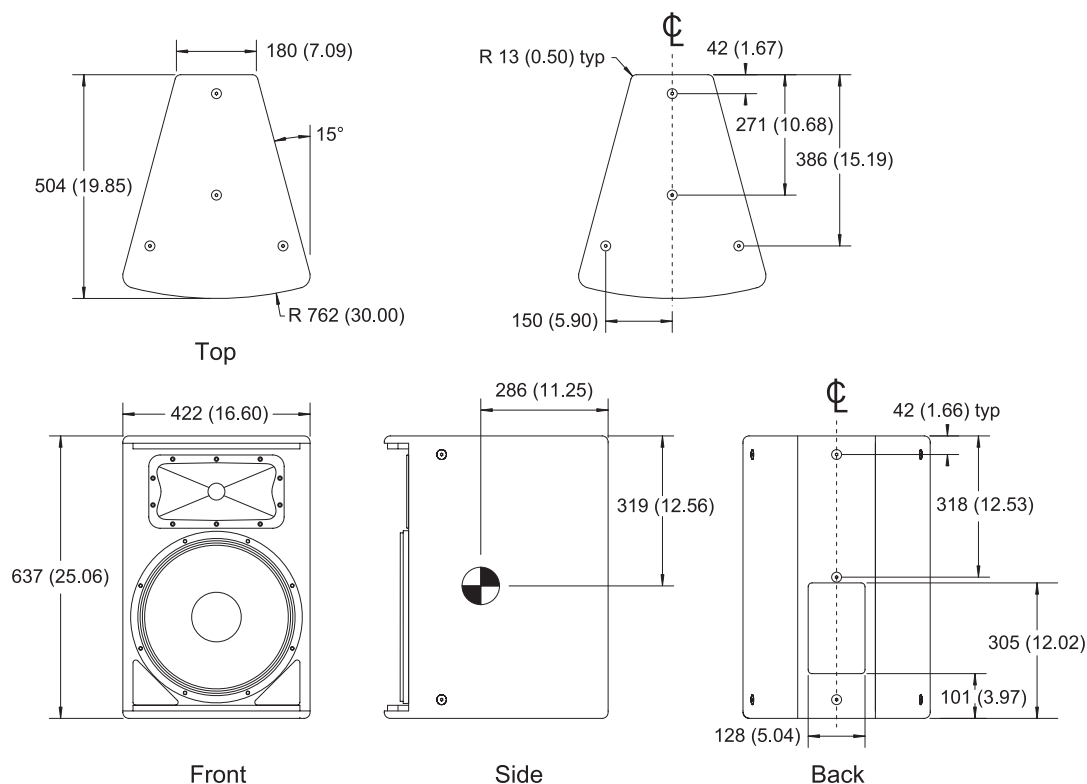

ENVIRONMENTAL CONSIDERATIONS

This loudspeaker is not intended for use as an outdoor speaker. An outdoor version of this speaker can be ordered from JBL. Contact JBL Professional for information.

RECOMMENDED DSP SETTINGS

Check www.jblpro.com/ae for the most recent recommended DSP tunings.

Note: Be aware that the end-result of identical panel settings on different digital signal processors can vary.



HA Harman International Company

JBL Professional
8500 Balboa Blvd.
Northridge, CA 91329 U.S.A.
818-894-8850

ADS AC2215/00
339390-020
Ver A 04/02