



# MZH 3015 L | MZH 3040 L

## Goosenecks for ME 34 | ME 35 | ME 36 microphone heads

**MZH 3040 L****MZH 3015 L**

The MZH 3015 L and MZH 3040 L are sturdy and elegant metal goosenecks with one flexible element for use with the ME 34, ME 35 and ME 36 microphone capsules. The LED light ring indicates an active microphone. The rugged, matte black goosenecks are fitted with a balanced floating XLR-5M connector, enabling the microphone to be powered from 12 - 48V phantom power. Two pins are dedicated for power supply of the LED ring.

### FEATURES

- Sturdy and elegant metal gooseneck for unobtrusive miking
- RF shielding against intermodulation from wireless equipment/devices
- LED light ring for speech indication
- AC/DC lightring powering

### PRODUCT VARIANTS

<b>MZH 3015 L</b>	Art. no. 009435
<b>MZH 3040 L</b>	Art. no. 009436

### ACCESSORIES

Microphone heads:


<b>ME 34</b>	black	Art. no. 005060
<b>ME 34 W</b>	white	Art. no. 005061
<b>ME 35</b>	black	Art. no. 005062
<b>ME 35 W</b>	white	Art. no. 005063
<b>ME 36</b>	black	Art. no. 005064
<b>ME 36 W</b>	white	Art. no. 005065

<b>MZT 30 L</b>	installation XLR 5F connector	Art. no. 009446
<b>MZS 31</b>	shockmount	Art. no. 005087

### SPECIFICATIONS

Connection	XLR 5
Phantom power	P12 - P48 V
Powering voltage lightring	9 - 30 V
Current consumption lightring	18 mA
Lightring connection polarity	no polarity
Coating	matte black
Diameter	6 mm
Number of flexible elements	1
Length	MZH 3015: 165 mm MZH 3040: 415 mm
Weight	MZH 3015: 73 g MZH 3040: 120 g

### CONNECTIVITY



- 1 Ground
- 2 Microphone +
- 3 Microphone -
- 4 LED: 9 - 30 V  $\equiv$  any polarity
- 5 LED: 9 - 30 V  $\equiv$  any polarity




## MZH 3015 L | MZH 3040 L


Goosenecks for ME 34 | ME 35 | ME 36 microphone heads

### DIMENSIONS

#### MZH3015L

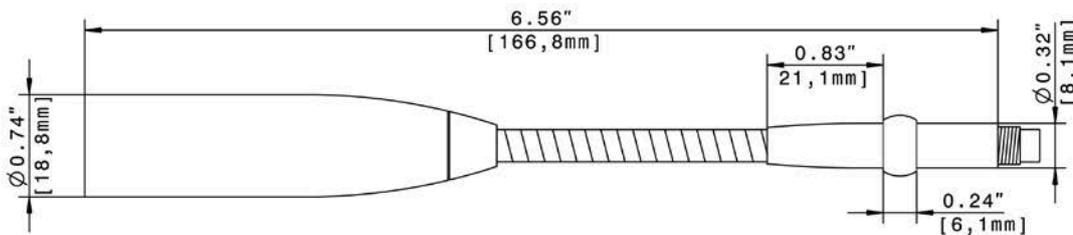

#### MZH3040L

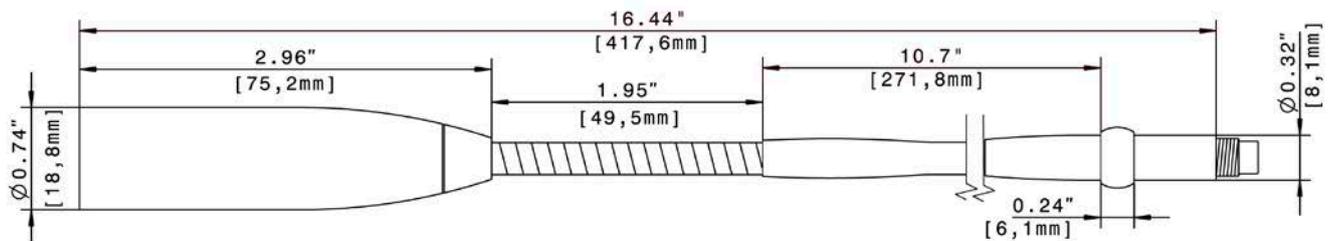

### ARCHITECT'S SPECIFICATION

The unit shall be streamlined in appearance, with a boom diameter of 8 mm (.31") and an overall length of 15 cm (5.9") and 40 cm (15.75"). It must also be finished with a durable anti-reflective matte black coating and have a pre-amp housed with its XLR-5 connector housing. The unit must be mountable using a table stand, direct to surface receptacle or via a silent shock mount system. The unit shall accept the ME34, ME35 and ME36 microphone capsules.

The unit shall be a Sennheiser MZH 3015 L.

The unit shall be a Sennheiser MZH 3040 L.